




EssenceStone

Rectified Color-body Porcelain Floor Tile

PRODUCTS

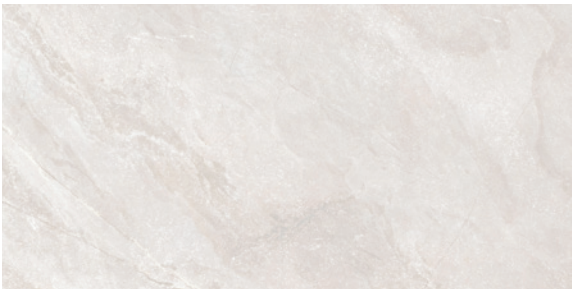


Alpine
24" x 48"
ANTHESAL24X48




Alpine
12" x 24"
ANTHESAL12X24



Sandcastle
24" x 48"
ANTHESSA24X48




Sandcastle
12" x 24"
ANTHESSA12X24

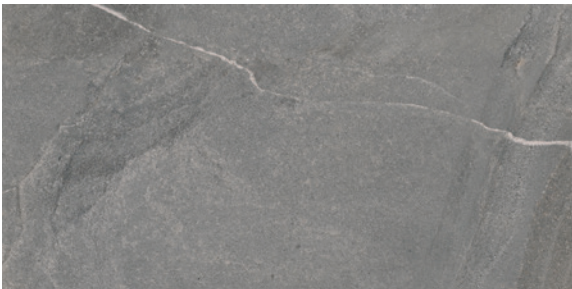


Dusk
24" x 48"
ANTHESDU24X48



Dusk
12" x 24"
ANTHESDU12X24

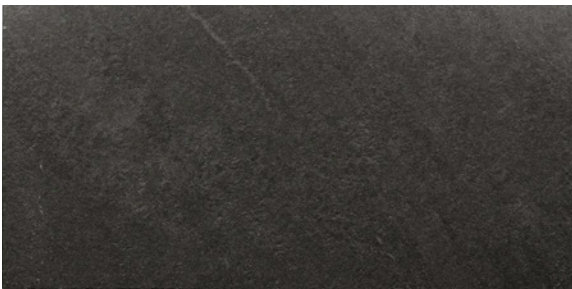

Velvet
24" x 48"
ANTHESVE24X48



Velvet
12" x 24"
ANTHESVE12X24

PRODUCT SPECS

All items available in:



12"x24"

Piece Size: 11.81"x23.62"
Thickness: 9 mm
Material: Porcelain
Faces: 20



24"x48"

Piece Size: 23.66"x47.24"
Thickness: 9 mm
Material: Porcelain
Faces: 8

	PCS/BOX	PCS/PALLET	BOXES/PALLET	BOX WEIGHT (LBS)	PALLET WEIGHT (LBS)	SQFT/PCS	SQFT/BOX	SQFT/PALLET
12"x24"	6	240	40	43.68	1747	1.937	11.622	464.88
24"x48"	2	72	36	63.48	2285	7.75	15.5	558

Technical Specs:

	Standard	Result
Scratch Resistance (MOHS)	MOH's Scale	Min. 7
Coefficient of Friction (DCOF)	ANSI A326.3	≥ 0.42
Deep Abrasion	ASTM C1243	Unglazed: Max 175mm
Color Uniformity	ASTM C609 and Section 9.3	Max. 3 Judds
Water Absorption	ASTM C373	Wa ≤ 0.5%
Breaking Strength	ASTM C648	Average ≥ J275 lbf. (1.22 kN)
Resistance to Freeze /Thaw Cycling	ASTM C1026	Pass
Shade and Texture Rating	—	V3

Usage:

Interior Wall

Interior Floor

Backsplash

Interior Countertop

Shower/Wet Areas

Fireplace Surrounds

Exterior Wall

Exterior Floor

Exterior Countertop

Pool/Fountain

All Items

Application - Residential/Commercial

*Recommended uses only apply for properly installed material according to TCNA guidelines. All information is subject to change; refer to the website for most updated information. Images were digitally enhanced; for color accuracy, please request a sample.

